


TOGE TSM High Performance

Allrounder concrete screw - for heavy loads

Steel - zinc-plated

Version with metric female thread
M8/M10

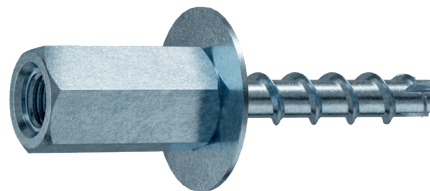

Size Disc-Ø
6 25,0 mm

ETA-15/0514
for anchoring in cracked and non-cracked concrete
C20/25 to C50/60
TSM 6 / 8 / 10 / 12 / 14

ETA-16/0123
for anchoring in cracked and non-cracked concrete
For multiple use in concrete for non-structural applications
TSM 5 / 6

ETA-23/0099
for anchoring in masonry
TSM 5 / 6 / 8 / 10

seismic
C1

R 30 - R 120

| Item nr. | Designation | Depth of drill hole $h_{01} / h_{02} / h_{03}$ | Embedment depth of anchor $h_{nom1} / h_{nom2} / h_{nom3}$ | Max. thickness of fixture $t_{fix1} / t_{fix2} / t_{fix3}$ | Packing Unit |
|-------------|--------------------|---|---|---|--------------|
| 344 006 035 | TSM 6x35 K IM 8/10 | 40mm / - / - | 35mm / - / - | - / - / - | 50 |
| 344 006 055 | TSM 6x55 IM 8/10 | 40mm / 45mm / 65mm | 35mm / 40mm / 55mm | 20mm / 15mm / - | 50 |